


REV

VERTICAL DEHUMIDIFIERS WITH HEAT RECOVERY FOR RADIANT SYSTEMS

REV 020



REV 050



The **REV** range dehumidifiers with high-efficiency heat recovery system are used in radiant cooling buildings together with an air renewal system. The REV dehumidifiers dehumidify, cool, heat and change the air. They recover heat from expelled air. High pressure and minimum electric consumptions are guaranteed by the adjustable electronic fans with permanent magnet brushless motor and cutting-edge incorporated inverter.

The top-quality refrigeration, hydraulic, aeraulic and electrical components make REV units state of the art dehumidifiers in terms of efficiency, reliability and silence. More than 90% yield is guaranteed by the high-efficiency counter-current heat recovery system. The modulating air renewal can be manual or automatic. The humidifier autonomously controls room temperature and humidity through the standard fitted temperature and humidity sensors. The dehumidifier autonomously controls room temperature and humidity through the optional temperature and humidity sensors. The REV dehumidifiers can be connected to a home automation system thanks to the optional RS485 serial port and requested software customization.

R-513a refrigerant gas is used in **REV** units.

Technical sheet of the range		REV 020			REV 035			REV 50		
		A	I	W	A	I	W	A	I	W
Dehumidifying capacity	L/Day	29	24,5	24,5	43	36	36	48	48	58
Nominal air flow	m³/h	260	260	260	380	380	380	520	520	520
Fresh air flow	m³/h	0 - 130	0 - 130	0 - 130	0 - 190	0 - 190	0 - 190	0 - 260	0 - 260	0 - 260
Recovery system efficiency	%	> 90%								
Cooling Power	W	Isothermal	1300	1920	Isothermal	2380	2700	Isothermal	3230	3650
Sound level	dB(A)	39	39	38	41	41	39	44	44	43
Power supply	V/ph/Hz	230 / 1~ +N / 50								
Dimensions (base x depth x height)	mm	600 x 380 x 980			650 x 430 x 1050			700 x 515 x 1430		
Empty weight	kg	60	60	50	65	65	55	90	90	75
type of installation		Wall mounting			Wall mounting			Base mounting		

All the values refer to the following conditions: Air temperature 26°C, Relative Humidity 65%, Water temperature 15°C W Version: water at 10°C

The REV range consists of 3 versions : A – I - W

A = Neutral air version (isothermal): The letter “A” represents a neutral air isothermal dehumidifier with air condensation, which is supplied as standard with pre and post cooling coils. The outlet air has the same temperature as the inlet air.


I = Cold integration version: The letter “I” represents a dehumidifier that can add cold power to the radiant system. Thanks to the presence of a brazed plate condenser, the “I” models cool the air as a normal air-conditioner, when required. This function is particularly useful, during half seasons, due to the high difference in temperature or when cooking or when gusts arrive. In order to operate, the “I” models must always receive water from the radiant system.

W = Water version: The letter “W” identifies an especially silent chilled water hydronic dehumidifier without compressor. The outlet air is always cooler than the inlet air. The “W” version supplies conditioned air in summer and heating in winter.

Summer functions

- Renewal
- Renewal + dehumidification
- Renewal + dehumidification + cooling
- Cooling
- Dehumidification
- Dehumidification + Cooling
- Free-cooling

- 1 Fresh air intake
- 2 Exhaust air intake
- 3 Room air intake (for recirculation)
- 4 Exhaust air discharge
- 5 Room air supply
- 6 Heat exchange coil
- 7 Blower fan
- 8 Compressor
- 9 Exhaust fan
- 10 Heat recovery system
- 11 Recirculation damper
- 12 Supply air filter
- 13 Recovery system air filter
- 14 Outdoor air filter
- 15 Outdoor air damper

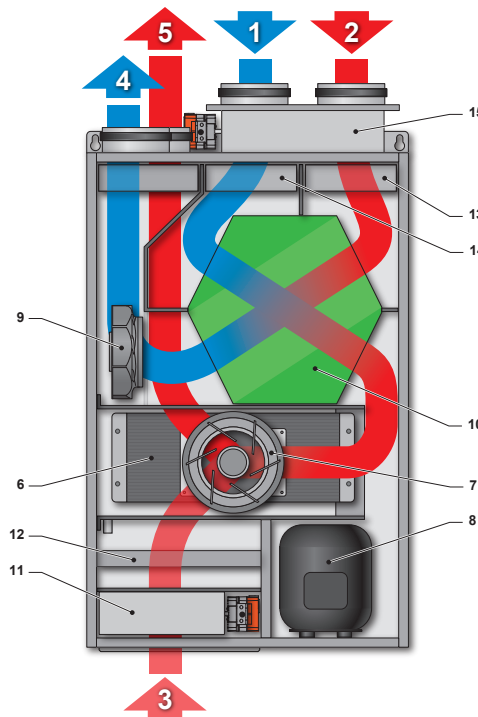

Winter functions

- Renewal
- Renewal + heating
- Heating
- Free-heating

Included:

- Remote on-wall graphic display with temperature and humidity probes
- Time bands program
- Multi-speed fresh air
- Electronic radial fans with brushless engine and inverter integrated
- Timed signal for air filters check
- Boost mode for fresh air
- Supply temperature control
- Dew point control
- Automatic defrost
- Alarm reporting



Options:

- Second display
- Outdoor air dampers for dew-point control
- Free-cooling
- High-efficiency air filter set
- Cable for display connection (5, 10, 20 m)
- Additional temperature and humidity probes on board
- CO2 probe
- VOC probe
- Recovery automatic defrost
- RS485 serial port
- Silent version
- Adjustable supply air temperature control in heating
- Display mounted on board
- Outdoor installation
- Formwork for indoor installation
- Kit for white lacquered panels
- Formwork for outdoor installation, with frontal panel
- Recirculation plenum
- Kit for recirculation ducting